


lightbars



15 Series

- Low profile unit with aerodynamic efficiency and unobtrusive styling
- High power LED auxiliary lighting available Alley & Takedown
- Low current draw
- Reliable solid state LED control electronics
- LEDs rated to 100,000 hours of operation
- Weather-proof housing
- 360 degrees light output option available
- Meets strict European EMC directives
- Polycarbonate lens with aluminium extrusion for strength and durability
- Unique mounting allows for a neat fit to the roof of the vehicle
- ANPR mounting kits available
- Height (centre) 53mm Width (centre) 305mm
- Lengths available: 460, 590, 720, 850, 980, 1110, 1240, 1370, 1500, 1630, 1760 and 1890mm
- May be controlled by conventional switches, relays or an integrated siren/amplifier switch (such as 809-001)

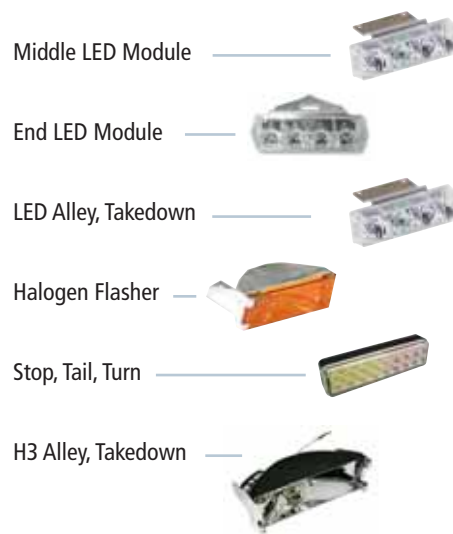

- LED Colours**
- red
 - blue
 - amber
 - magenta
 - green
 - white
 - red/blue

- Upper Lens Colours**
- red
 - blue
 - amber
 - C clear

V	✓	🕒
12 and 24	e, ↻	 2 years 5 years





15 Series Configurations

Consider the following options when ordering your lightbar

Size of lightbar

Voltage - 12V or 24V

Top lens colour

LED colours

Mounting options - please refer to gutter mounting table in rear of catalogue

Selecting scene lighting and side LEDs



**SINGLE END LED
MODULE**



**TAKEDOWN & ALLEY
Halogen**



**TAKEDOWN & ALLEY
LED**



**STOP/TAIL/TURN LED
Combined**



**ALLEY + ANGLED
MODULES**

Selecting front and rear LED modules

EXAMPLE

2 X front single end modules

6 X front modules

8 X rear modules

2 X rear single end modules

= 18 modules

2 X LED alley lights

2 X LED takedown lights

